


# FLECOTEC

## FLECOLINER (Continuous liner system)

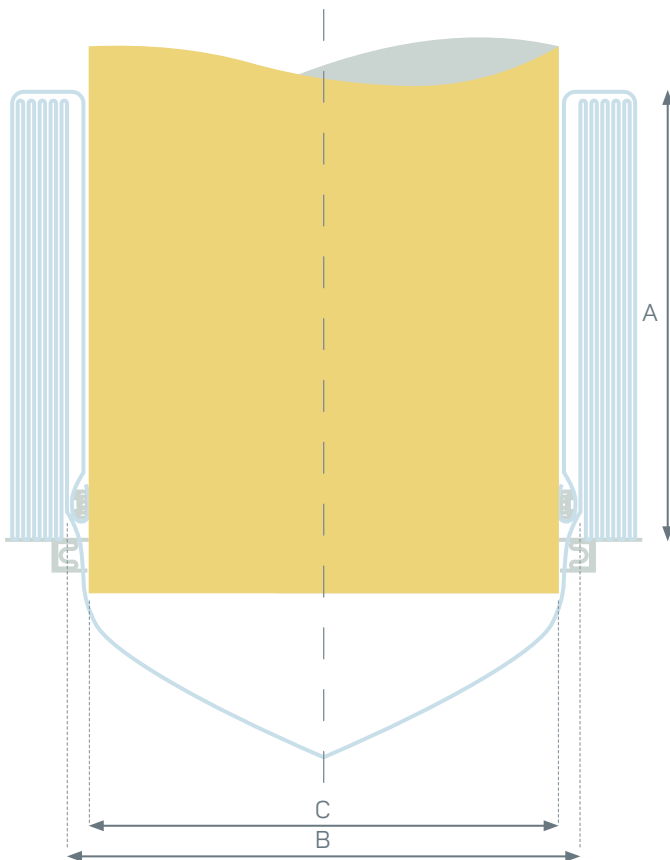

### FLECOLINER FL

CONTINUOUS LINERS ARE USED IN THE FILLING OF HIGHLY TOXIC PRODUCTS. REQUIREMENTS FOR CONTAINMENT LEVEL OEB 5 CAN BE MET DEPENDING ON THE CLOSURE SYSTEM.

Flecoliner is manufactured as standard using the Flecofilm types DL, ML and PL. Flecoliner manufactured from supplied film on request.

The respective folding heights and film lengths are dependent on the film thickness.

#### STANDARD SIZES

	FL 500	FL 600	FL 700	FL 800
Film width (mm)	500	600	700	800
Film diameter B (mm)	320	380	450	500
Carrier diameter C (mm)	220	300	340	370
Folding height A (mm)	150-400	150-400	150-400	150-500
Film length L (m)	20-40	20-40	30-50	30-50

(special sizes on request)





Flecotec AG

Schweighofstrasse 3  
79410 Badenweiler  
Germany

T + 49 7632 828 553-0  
F + 49 7632 828 553-9

[mail.ft@rommelag.com](mailto:mail.ft@rommelag.com)  
[www.rommelag.com](http://www.rommelag.com)

