

bottelpack®
bp 324M

Aseptic Blow-Fill-Seal packaging machine for the production of ampoules



bp 324M		volume max. (ml)	max. container width (mm)	capacity (approx. pieces/h)
16-cavities	multi	40	36	4,800
	single	40	33	
20-cavities	multi	30	28	6,000
	single	20	25	
24-cavities	multi	20	22	7,200
	multi	20	23	
	single	10	20.5	
28-cavities	multi	20	19	8,400
	single	10	16	
30-cavities	multi	20	17	9,000
	single	10	14	
32-cavities	multi	20	17	9,600
	single	10	14	
36-cavities	multi	10	15	10,800
40-cavities	multi	5	13	12,000

Capacity indications subject to:
type of plastic, shape of ampoule, weight of bottle, nature of filling liquid

multi = multiblock
single = individual ampoule



x = max. container width

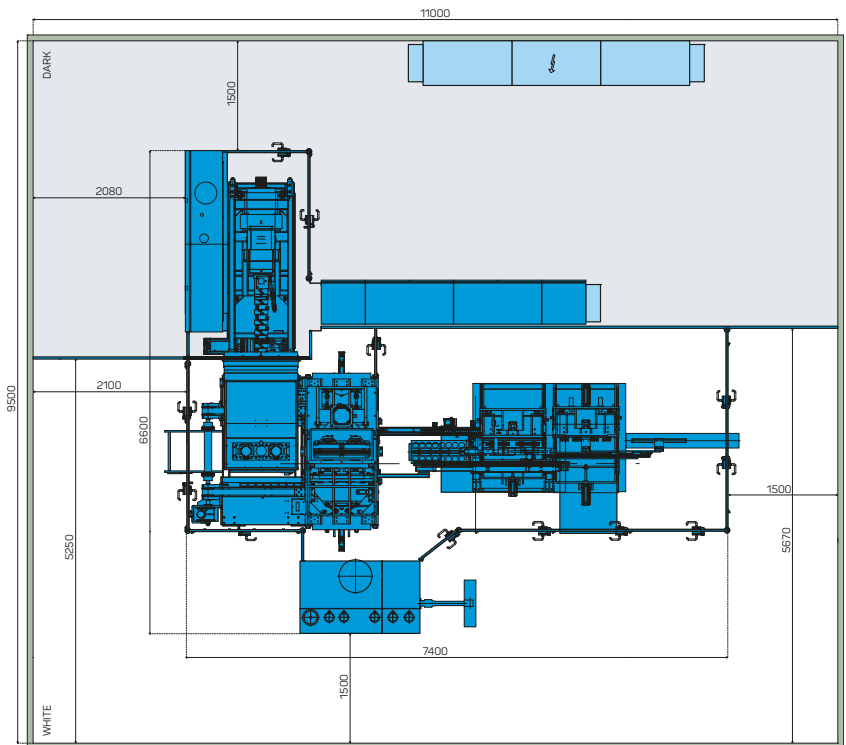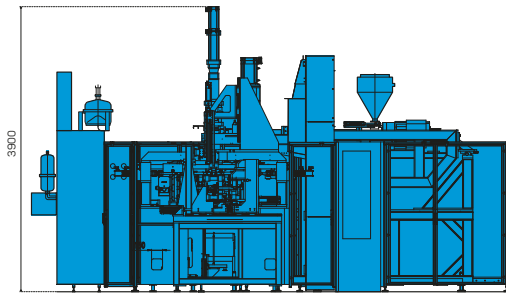

- Machine
- Cleanroom with dark/white separation
- Control cabinet

Upon request the machine can be executed without dark/white separation. Dimensions are depending on final project specifications.

Technical Data

- ▶ **Power:**
3 x 400 V ± 10 % + neutral + earth · 50/60 Hz
- ▶ **Extruder:**
KP55-24D
- ▶ **Electrical supply:**
96 kVA
- ▶ **∅ Consumption:**
60 kW
- ▶ **Compressed air:**
· Piston displacement approx. 350 sl/min in oil-free quality
· Operation pressure 8 bar minimum
- ▶ **Cooling water (closed cycle cooling):**
Approx. 5 m³/h with 12 °C and 4 bar, dirt-filtered ≤ 55 micron
- ▶ **City water consumption:**
Approx. 60 l/h with 12 °C and 4 bar, dirt-filtered ≤ 55 micron
- ▶ **Steam (only for machines which are sterilized):**
· Pure steam 2.5 bar, particle-filtered ≤ 1 micron (DIN58950-7)
· Consumption at sterilization: approx. 60 kg/h
- ▶ **Dosing:**
Time-pressure-dosing continuously adjustable for each single cavity with filling volumes between 0.1 ml and 40 ml
- ▶ **Extruder:**
· Extruder with continuously regulable electric drive
· Screw ∅ 55 – 24D melting capacity up to max. 80 kg/h
· The melting capacity refers to polyethylene LDPE up to 0.93 density – other plastics may vary
- ▶ **Extrusion head:**
With exchangeable nozzles
- ▶ **Weight of machine:**
Approx. 12 tons
- ▶ **Soil bearing value:**
Approx. 1.6 tons/m²
- ▶ **Extra and special equipment:**
· **coolBFS** to fill heat sensitive products
· Multi-layer containers to provide gas permeation barriers
· Integrated circulation function to fill suspensions
· Laser system for container coding and separation
· And many other customer specific options

Technical modifications reserved

Rommelag Kunststoff-Maschinen Vertriebsgesellschaft mbH
Mayenner Straße 18 – 20 · 71332 Waiblingen · Germany
T +49 7151 95811-0 · F +49 7151 15526 · mail.rd@rommelag.com · www.rommelag.com

Rommelag USA, Inc.
27905 Meadow Drive · Suite 9 · Evergreen · CO 80439 · USA
T +1 303 674 8333 · F +1 303 670 2666 · www.rommelag.com

Rommelag AG
Fabrikweg 16 · 5033 Buchs · Switzerland
T +41 62 834 55 55 · F +41 62 834 55 00 · mail.ch@rommelag.com · www.rommelag.com

Rommelag Trading (Shanghai) Co., Ltd.
Room 905-906 · Building B · Greenland Center · No.600 Longhua Middle Road
Xuhui District · Shanghai P.R. China · 200032
T +86 21 6335 8881 · T +86 21 6335 8882 · F +86 21 6335 8883 · www.rommelag.com